

NITTAN FIRE ALARM SYSTEM

CATALOGUE No.


FA4003

Manual Alarm Station, Bell and Others


MANUAL ALARM STATION




P-1 RECESSED/1MF1




P-1 SURFACE/1MF1-R



P-2 RECESSED/2ME1



P-2 SURFACE/2ME1-R



DESCRIPTION

The Nittan "P" series Manual Alarm Station is designed for use in conjunction with the 1PF1 series, 2PDO series, and other compatible Nittan control panels.

These stations are available either.

- (a) P-1 type which has the facilities of a telephone jack to communicate with the control panel, and a confirmation lamp to indicate the initiation of the system, or
- (b) P-2 type which has only the confirmation lamp.

The manual alarm station type is selected according to the control panel used.


ADVANTAGES

1. Stylish
2. Light weight
3. Strongly built
4. Ease of installation and maintenance
5. Latching action when operated
6. Reset Button provided for easy reset
7. No break rods necessary
8. No replacement of protection glass necessary after activation
9. Integral response indicator
10. Telephone communication facility (P-1 type only)

SPECIFICATION

Classification	P-1 Type		P-2 Type	
	1MF1	1MF1-R	2ME1	2ME1-R
Model No.	1MF1	1MF1-R	2ME1	2ME1-R
Contact Cap.	30V DC 250mA			
Mounting Type	Recessed	Surface	Recessed	Surface
Application	Indoor			
Colour	Red			
Material	Synthetic Resin			
Weight	200g	650g	200g	650g


■ BELL

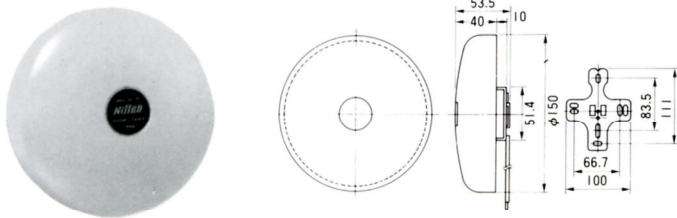

SPECIFICATION

Model No.	BD-6-24-8
Application	Local Bell
Rated Voltage	24V DC
Rated Current	12.5mA
Colour	Red
Terminal	Lead Wire
Mass	0.56kg

■ INDICATION LAMP

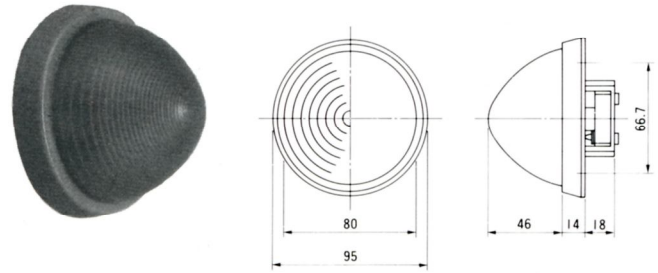


SPECIFICATION

Model No.	PL-R4-LED	PL-30R4
Bulb	LED 24V AC/DC-0.5W	30V AC/DC-2W
Colour	Red	
Material	Polycarbonate	
Mass	0.10kg	

■ LOCAL COMBINED BOX



Surface Mounting Type SR-01M4L-47SD (P-1 Type)
SR-02M4L-47SD (P-2 Type)

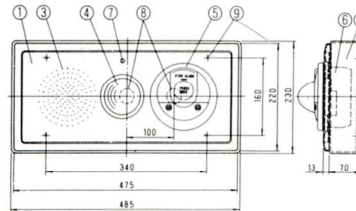


SPECIFICATION

1. Plate
 2. Box
 3. Alarm Outlet
 4. Indication Lamp
 5. Manual Alarm Station
 6. Bell
 7. Panel Screw
 8. Wiring Outlet
 9. Fixing Screw
- Colour: Munsel Colour Code 2.5 Y 9/1




Recessed Mounting Type SU-01M4L-47SD (P-1 Type)
SU-02M4L-47SD (P-2 Type)

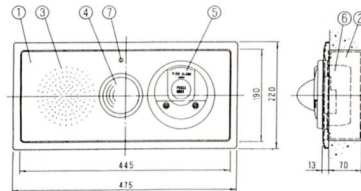

SPECIFICATION

1. Plate
 2. Recessed Box
 3. Alarm Outlet
 4. Indication Lamp
 5. Manual Alarm Station
 6. Bell
 7. Panel Screw
- Colour: Munsel Colour Code 2.5 Y 9/1

■ ANNUNCIATOR PANEL/PSD

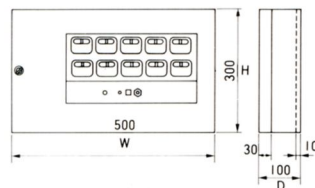

SPECIFICATION

Model No.	PSD-nL											
Zone No.	5	10	15	20	25	30	40	50	60	80	100	
Voltage	24V DC (20.4~26.4V)											
Colour	Munsel Colour Code 2.5 Y 9/1											
Dimension (mm)	(H)	300	500	670	890	1110	1330					
	(W)	500	500	500	500	500	500	500	500	500	500	
	(D)	100	100	100	100	100	100	100	100	100	100	
Mass	6.8kg~25.5kg											

This unit is positioned where an additional indicator unit is required. It consists of display windows, a buzzer and telephone jack to communicate with a control panel.

NITAN COMPANY, LIMITED

11-6,1-Chome, Hatagaya, Shibuya-ku, Tokyo 151-8535 Japan
Tel:81-3-3468-1127 Fax:81-3-3468-1129

NITAN (UK) LTD.

Hipley Street, Old Woking, Surrey, England
Tel:1483-769555 Fax:1483-756686

DISTRIBUTOR